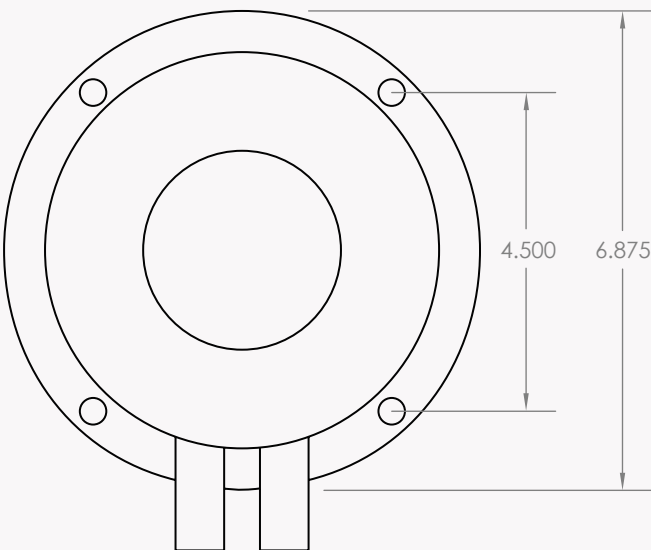


DIRECT BURIAL TRANSFORMER

The Direct Burial Transformers are 'from scratch' designs and are tested to meet or exceed UL1838 and IP67 Standards. With every connection fully encapsulated in epoxy, these transformers are built to last a lifetime!

CS Direct Burial Transformers, like all of our AC transformers, are suitable for lighting only and may not be used with audio products.



GREY



DIRECT BURIAL TRANSFORMER SPECIFICATIONS

Size (H x W x D): 3.75in x 6.875in x 7.5in

Weight: 12 lbs

Construction: ABS Plastic, Fully Potted AC Toroidal Transformer, Soldered Wire Connections

Output Voltage: 15VAC

Finish: Grey ABS Plastic

Wattage: 150W (1 Output) / 300W (2 Outputs)

Mounting: Surface or Direct Burial

Input Wiring: 120VAC 3-Prong Plug

Output Wiring: Patented Coastal Connector™

Fuses: Replace with max 15A, 3AG, Slo-Blow/Time Delay fuse

Warranty: 5-Year Limited Warranty*



ORDERING INFORMATION

FIXTURE	WATTAGE	FINISH
DBT (DIRECT BURIAL TRANSFORMER)	150X (150 WATT)	GR (GREY ABS PLASTIC) ■
	300X (300 WATT)	

DBT — **150X** — **GR**

e.g. **DBT150XGR** = 150 Watts, Grey ABS Plastic Direct Burial Transformer

ACCESSORIES

SKU	ITEM	
TIMERLS	Light Sensing Digital Timer	
TIMER880	Intermatic HB880R Timer	

Note: Coastal Source Direct Burial Transformers utilize robust toroidal transformers. Toroidal transformers have a higher in-rush current at startup than other transformer types. This can cause some breakers and GFCIs to trip on startup. High Magnetic breakers are recommended to prevent this nuisance tripping.

*Lifetime Warranty for certified installations. See terms and conditions of sale for details.